

Recommendations on fabric: heavy-weight cotton fabric; denim.

You will also need: fusible interfacing, 16 cm zipper, a 20 mm shank button, six 15 mm buttons.

Seam allowances: on hem - 3.5 cm, upper edge of side and back pockets - 3.5 cm, other seams – 1.0 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.




CUTTING:

Main fabric:

1. Back patch pocket - cut 2 (A)
2. Front patch pocket - cut 2 (B)
3. Belt loop - cut 1 (C)
4. Side pocket - cut 2 (D)
5. Front - cut 2 (E)
6. Button catch _ cut 1 (F)
7. Back - cut 2 (G)
8. Yoke - cut 2 (H)
9. Side pocket flap - cut 4 (I)
10. Back pocket flap - cut 4 (J)
11. Waistband - cut 1 (K)

Fusible interfacing: half width of waistband.

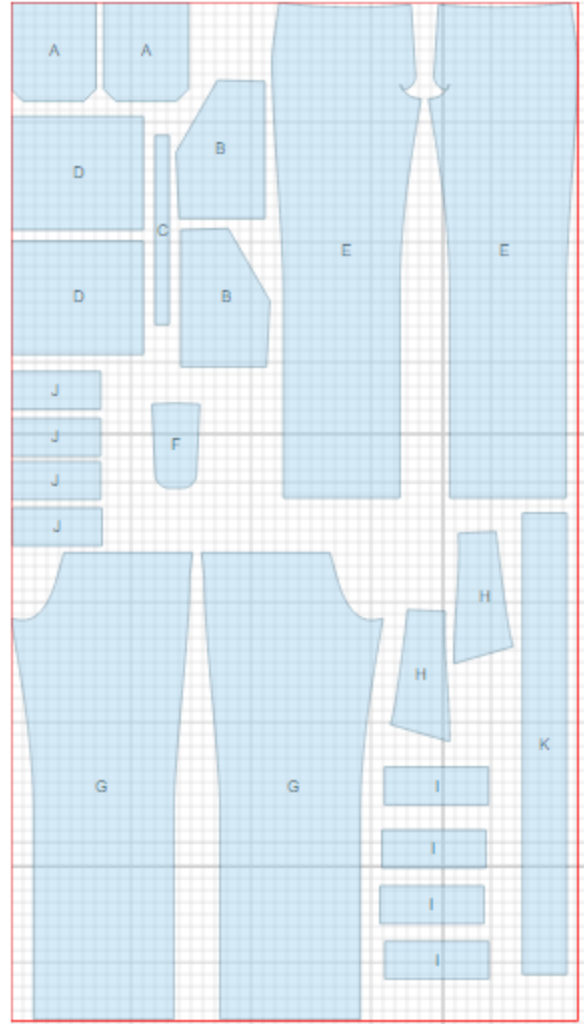

INSTRUCTIONS:

1. Stitch yokes to backs. Press seam allowances upwards, topstitch yokes close to joining seams at 0.75 cm distance.
2. Press diagonal edge of front patch pocket to wrong side, fold it again and stitch along edge. Press outer edges of front patch pocket under and topstitch to fronts along marking. Topstitch pockets along edges and at 0.75 cm. baste pockets to trousers' side edges. Lay flaps right sides together, and sew outer edges, turn right side out, press and topstitch along edges and at 0.75 cm distance.
3. Make buttonholes according to marks.

-
4. Press upper edge of back patch pocket to wrong side, fold under again and top stitch along edge. Press outer edges under and topstitch pockets on back along marking at 0.75 cm distance. Sew back flap (upwards) on trousers' right side. Fold the flap downwards, press it and topstitch at 0.75 cm distance.
 5. Sew side seams. Press seams toward back. Topstitch close to seams and at 0.75 cm distance.
 6. Make pleats on side pocket according to marks, press it, then topstitch at 3 mm from fold. Press pocket's upper edge to wrong side, fold again and topstitch along the edge.
 7. Press outer edges of side pocket to wrong side and sew to garment: topstitch pocket's side edges (do not catch the pleat), then topstitch lower edge.
 8. Sew the flap (upwards) to trousers' right side. Fold the flap downwards, press and topstitch along the edge and at 0.75 cm.
 9. Sew in the fly zipper using this method by Deb of So Sew Easy <https://youtu.be/k7HkxpaKips> or use your favorite method.
 10. Stitch inside leg seams and neaten allowances.
 11. Belt-loop strip: press lengthwise allowances into wrong side at 1 cm width, press the strip along the center, stitch lengthwise edges together and topstitch the strip along fold. Cut the strip into 5 equal pieces. Tack belt loops to trousers' upper edge as follows: on front: near pockets and side seams; on back part – above middle seam.
 12. Fold the waistband along the center and sew the short ends; then turn it right side out and press. Sew the waistband with its interfaced side on right side of trousers' waist edge. Press raw edge under baste to the garment. Topstitch along waistband perimeter. Fold belt loops upwards and topstitch at waistband upper edge.
 13. Press trousers' hems to wrong side, fold under again, and stitch along edges.
 14. Make a buttonhole in waistband left end; attach button on right. Sew decorative buttons to pocket flaps.

TECHNICAL DRAWING:

