Sewing Pattern — Trousers 5005

Recommendations on fabric: gabardine

You will also need: 1 zipper of 20 cm length; 1 button; hard interfacing for the belt

If the pattern has double contour the seam allowances are included.
If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out and cutting details.

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

CUTTING:

1. Back part – 2 pieces
2. Front part – 2 pieces
3. Belt – 1 piece

INSTRUCTIONS:

1. Sew side seams, leaving an unsewn part (for zipper) left seam upper part. Sew middle seams. Sew front and back seat seams with one stitch.

2. Press zipper allowances into wrong side. Sew the zipper from inside neatly.

3. Join the belt and the interfacing. Sew the belt to trousers upper edges, leaving closure allowance on the back end. Fold the belt (half-wide) into right side, trim ends neatly. Turn the inner edge of the belt and sew it on the joining seam. Make a buttonhole into bend front end. Sew the button accordingly to the belt allowance buttonhole.

4. Press hems' allowances under and sew it.
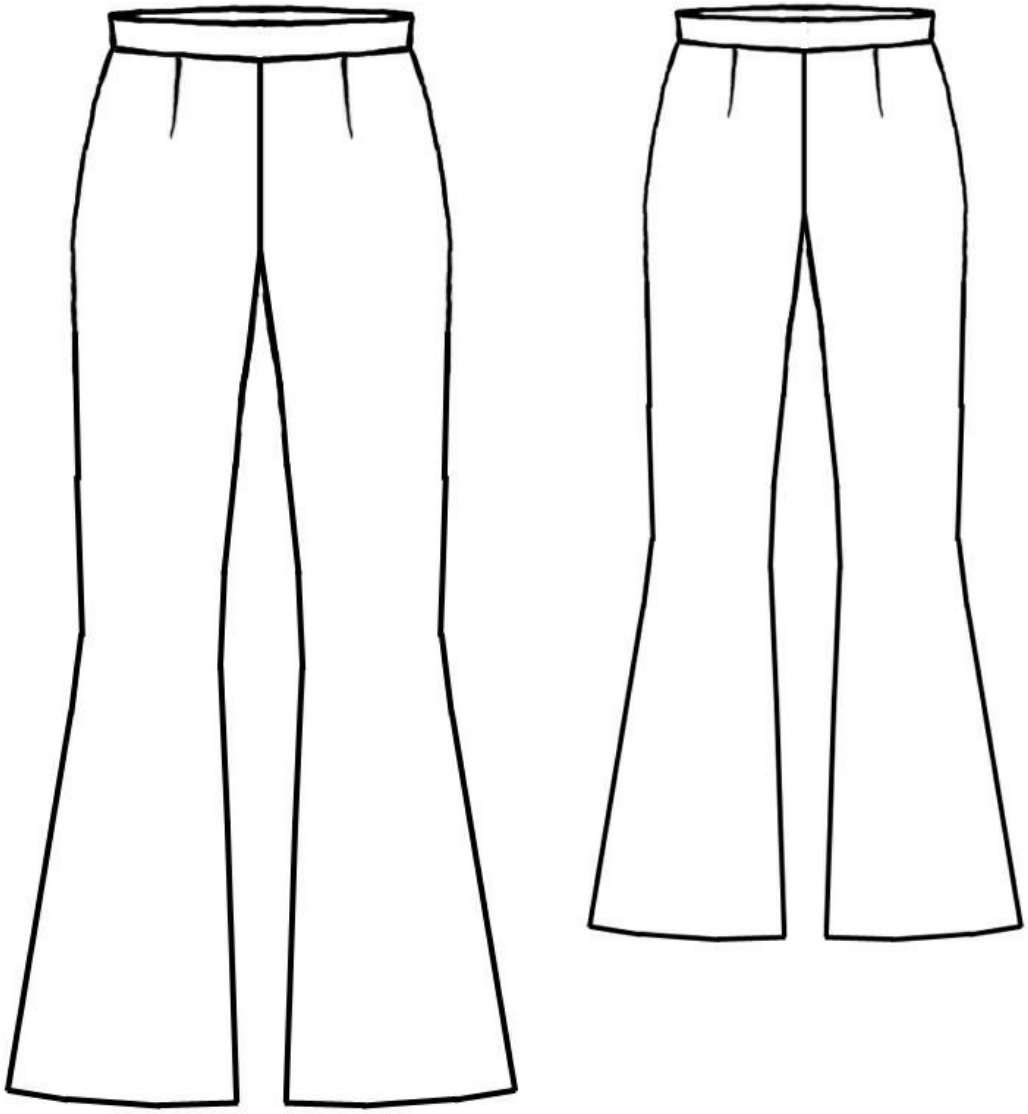
TECHNICAL DRAWING: