

Sewing Pattern — Skirt 4377

Recommendations on fabric: lightweight, well-draping suiting fabric

You will also need: fusible interfacing, invisible zipper

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam allowance: all seams - 1 cm; lower edge of front and back panels - 3 cm; vertical edge of front fall - 2 cm

Attention! First of all, please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to take into account pieces to be duplicated or cut on a fold.

When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

CUTTING:

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.


Darts: The fold of the dart is always pressed toward the center of your garment, or down toward the hem.

Fabric:

1. Back – cut 2
2. Front – cut 1
3. Fall part – cut 1
4. Back yoke – cut 2
5. Front yoke - cut 2

Fusible interfacing:

1. Back yoke – cut 1
2. Front yoke - cut 1

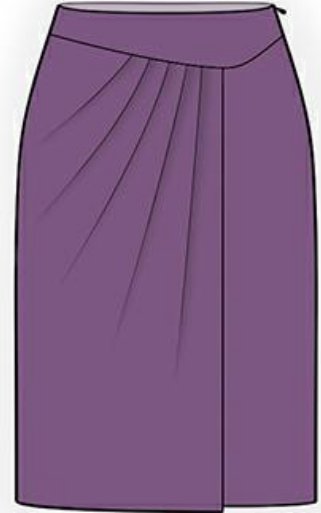

INSTRUCTIONS:

1. Apply fusible interfacing to outer yokes and to vertical seam allowance of outer fall part.
2. Sew darts on back panel, press darts toward center. Sew back panel together. Serge and press seam toward left. Sew outer back yoke to back panel, press seam allowances upwards.
3. Serge outer and lower edges of front fall part. Turn seam allowance of outer edge under, and topstitch at 2 cm from the edge. Turn lower edge under and topstitch. Make and fasten pleats on outer fall part. Pint outer fall part on front, baste on edges and then sew as one detail (outer fall part on right side edge is shorter than front panel at seam allowance width).
4. Sew outer front yoke to front panel, press seam allowances upwards.
5. Sew right side edge, serge and press seam toward back. Serge left side edges separately. Sew left side seam from zipper mark to hem. Press seam allowances apart, pressing the opening for zipper. Sew in zipper.
6. Sew and press apart right side seam of inner yoke. Serge lower edge. Pin the facing and skirt right sides together and sew on upper edge. Clip into curves and understitch. Turn facing onto wrong side, press. Turn side edges under and sew to zipper tape. Topstitch yoke into outer yoke connecting seam.
7. Serge lower edge of the skirt, press seam onto wrong side, and slip-stitch.

TECHNICAL DRAWING:

