

Recommendations on fabric: medium stretch-knit fabric, natural or mixed blouse fabric of matching colour.

You will also need: knit bias tape, 6 buttons.


Seam allowances: on hem overlay edge - 2.0 cm, front/back neckline - 0 cm, hem of sleeve - 1.5 cm, other seams - 0.8 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

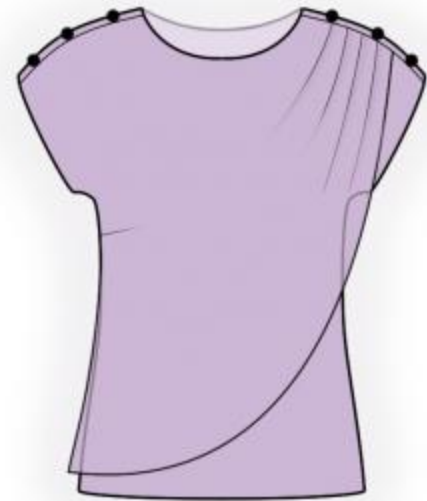


CUTTING:

Knit fabric:

1. Back – cut 1 on fold (A)
2. Front - cut 1 on fold (B)
3. Overlay - cut 1 (C)

Blouse fabric:

1. Shoulder strap - cut 2 (D)

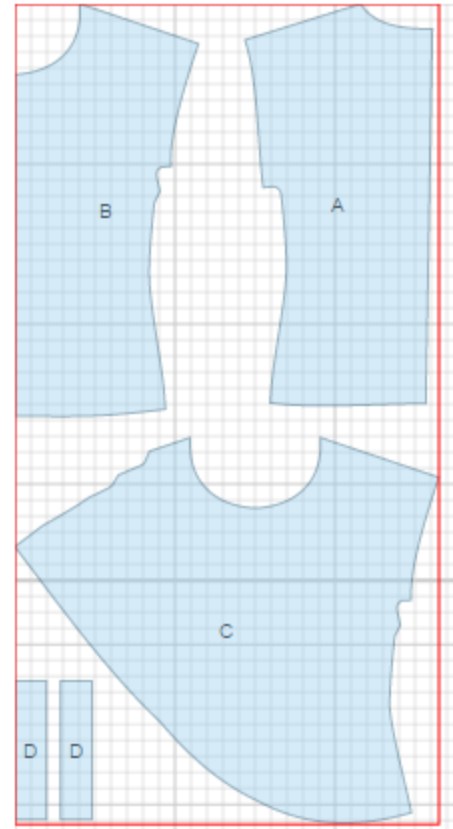

INSTRUCTIONS:

1. Sew darts on front and overlay, press upwards.
2. Serge outer edge of overlay, turn under and topstitch.
3. Make and fasten pleats on overlay, folds are directed towards center. Pin overlay to front on edges and then sew as one piece.
4. Sew right shoulder seam, serge and press seam towards back. Finish neckline with knit bias tape. Sew left shoulder seam, serge and press towards back.

5. Sew side seams. Serge and press seams towards back.
8. Serge lower edge of blouse and sleeves, turn under and topstitch.
9. Press edges of strap under. Lay strap on shoulder seam and topstitch. Sew buttons on strap.

TECHNICAL DRAWING:

