

## S3075 Sewist 3075

Recommended fabrics: natural/mixed dress or suiting fabrics.

Seam allowances: all seams 3/8 inch, hem of skirt 1 inch, center back seam - 5/8 inch to allow for zipper installation, hem of peplum - 5/8 inch.

**Note on seam allowances:**

- If the pattern has double contour the seam allowances are included.

- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

**Note on length of fabric:**

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. You are welcome to use the Online Fabric Estimator to make calculations.

Alternatively, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.



### PRINTING:

Please use Adobe Reader software to open your PDF pattern. You can get Adobe Reader free of charge at this link - <https://get.adobe.com/reader/>.

Make sure you print your patterns at actual size (100%% scale or None) and on single sides of plain A4 paper. Verify that the print out size is to the correct scale by measuring the test square on the first page. The upper edge of the square features a centimeter scale, and the bottom edge features an inch scale.

Trim top and/or right margin of the pages where you see the scissors symbols. In the center of each page, the number of row and column is printed, separated by / sign. Construct layout pages according to these marks (for example, page marked 2/3 is in the second row and in the third column). Align pages using margins and tape or glue together.

## CUTTING:

### Note on cutting:

Lay out your pieces according to straight of grain as marked on the pattern pieces.

Some pieces will be cut on the fold, the corresponding edge will then be marked with a fold mark. Kindly pay attention to notes regarding type of fabric and quantity of required pieces on a block. For example, [ Main, Interfacing - cut 1+1 ] on a pattern piece means that you need to cut 1 piece as is and 1 mirrored piece from the main fabric as well as from interfacing.

Make sure to mark all notches and other design features such as pleats etc. from the pattern piece onto your fabric. When sewing the garment, pay attention to notches, they must match up.


### Main

- (A) Back - cut 1 +1
- (B) Front - cut 1 on fold
- (C) Peplum - cut 1 +1
- (D) Waistband - cut 1 on fold

### Interfacing

- (D) Waistband - cut 1 on fold

\* The capital letters in brackets correspond to pattern blocks as seen in Online Fabric Estimator and in pattern blocks preview on the right.

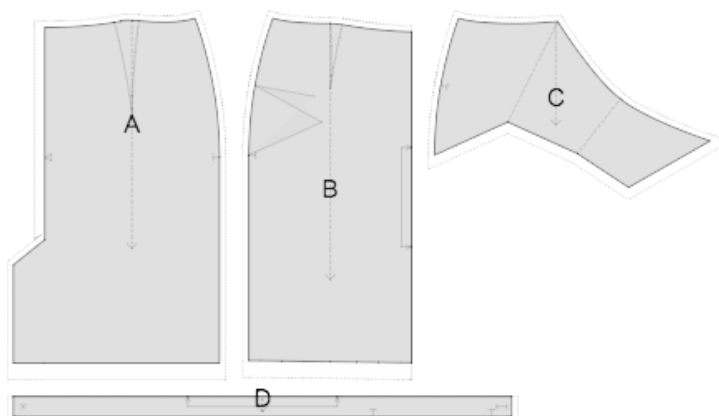

## INSTRUCTIONS:

1. Apply fusible interfacing to waistband.
2. Sew darts on front, press bulks towards center.
3. Sew darts on back, press bulks towards center.
4. Pin peplum onto front along side seam from notch to top edge, wrong side of peplum to right side of front skirt. Pin back skirt on top of it, right side to the right side of front skirt - the peplum is between the pieces. Sew side seam. Serge and press towards back. Repeat for the second side seam.
5. Serge center back seams separately. Sew center back seam from notch for zipper to vent corner. Clip into seam allowance near the vent corner. Press seam apart between vent corner and upper edge, pressing the slit for zipper at the same time. Fold left vent under and press. Baste slanted edge of vent to the left back and topstitch in

place from the right side.

6. Serge edges of the waistband. Pin waistband to skirt, right sides together, so that the short edge matches the center edge of the right back. Match notches. The left side of the waistband will be longer than the center edge of the left skirt. Sew along the waistband and press towards waistband.
7. Pin together and sew the short edge of the waistband and the distance to center edge of the left side back. Trim corners, turn the waistband the right side out and press.
8. Turn lower seam allowance on inner waistband under, pin in place and stitch-in-the-ditch into seam between skirt and waistband, from the right side.
9. Make buttonhole on the left side of the waistband and sew a button onto the right side of the waistband according to markings.
10. Hem skirt by hand or machine as desired.

## TECHNICAL DRAWING:

