

## Sewing Pattern — Skirt 4281

Recommendations on fabric: natural or mixed well draping costume fabric

You will also need: fusing, 6 buttons


If the pattern has double contour the seam allowances are included.

Seam allowances are NOT included by default and need to be added when laying out and cutting details if your pattern has single contour.

Seam allowance: all seams - 1 cm, along center edge of left front part and along the slit of right front part - 4.5 cm

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

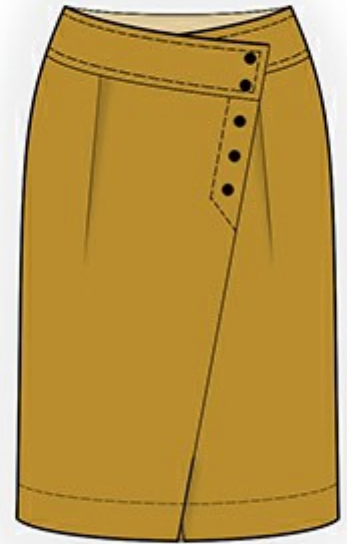

### **CUTTING:**

#### Main fabric:

1. Back yoke – 2 details
2. Back part – 1 detail
3. Front yoke - 4 details
4. Right front part – 1 detail
5. Left front part – 1 detail
6. Facing of back part hem – 1 detail
7. Facing of front part hem – 2 details

#### Fusing:

1. Back yoke – 1 detail
2. Front yoke - 2 details
3. Facing of back part hem – 1 detail
4. Facing of front part hem – 2 details

### **INSTRUCTIONS:**

1. Apply fusing to details, as well as to one-piece facing of front part.
2. Sew darts on back parts of the skirt. Press depths towards center.
3. Make and fasten pleats according to markers on front parts, depths are turned towards side edges. Serge one-piece seam allowance of center edge on left part, press it onto wrong side. On right part slash seam allowance near fly-piece and near slit marker. Serge the fly-piece, edge between notches and seam allowance of the slit. Press fly-piece and seam allowance of the slit onto wrong side.

4. Put right front part onto left right sides together, aligning long notch on left part and marked center seam on right part and topstitch. Turn details right side out. Topstitch the fly-piece onto skirt panel according to markers: from top edge up to slanting line only onto right part, then along the slanting line onto right and left part .
5. Sew side seams, press seam onto back part and serge.
6. Sew side seams of outer and inner yokes, press seam allowances apart. Fold yokes right sides together and overstitch upper edge and center edge of front part. Start and finish the stitch exactly near marked yoke connecting seam. Slash seam allowances, slash away in corners. Turn detail right side out, press. Stitch outer yoke to top edge of the skirt, press seam allowances upwards. Turn inside lower edge of inner yoke and topstitch into connecting seam.
7. Sew side seams of lower facings, press seam allowances apart. Serge upper edge. Stitch facings to slit allowances, press seam onto the facing, overstitch lower edge. Slash seam allowances, turn the facing wrong side out, straighten corners, press. Put decorative stitch of 5 cm wide along lower edge.
8. Put decorative stitch at 0.8 cm along the perimeter of the yoke.
9. Mark and serge buttonholes on right part. Make buttonhole on inner yoke. Sew the buttons on.

**TECHNICAL DRAWING:**

