

Sewing Pattern — Dress 4043

Recommendations on fabric: thick fabric suitable for dresses .

You will also need: lining; fusing; blind zipper; 3 hooks with eyes.


If the pattern has double contour the seam allowances are included.

Seam allowances are NOT included by default and need to be added when laying out and cutting details if your pattern has single contour.

Seam allowance: all seams -1 cm; on hem of the dress and top edge of front part inset – 3 cm; along vent – 6 cm

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

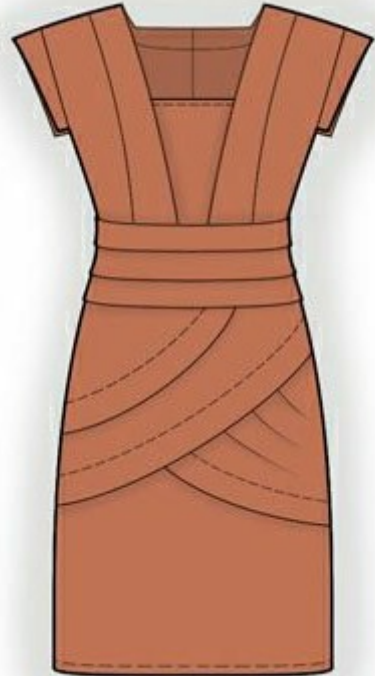

CUTTING:

Main fabric:

1. Upper back part - 2 details
2. Lower back part - 2 details
3. Central top front part – 2 details
4. Side top front part – 2 details
5. Inset of front part - 1 detail
6. Sleeve of back part - 4 details
7. Sleeve of front part - 4 details
8. Back neckline facing - 2 details
9. Belt - 1 detail
10. Buttonstand - 2 details
11. Top part of the skirt - 1 detail
12. Middle part of the skirt - 1 detail
13. Middle part of the skirt_2 - 1 detail
14. Lower part of the skirt - 1 detail
15. Facing of top part of the skirt - 1 detail
16. Facing of middle part of the skirt - 1 detail
17. Facing of middle part of the skirt_2 - 1 detail

Lining:

1. Lining of the belt - 1 detail

Fusing:

1. Buttonstand – 2 details
2. Back neckline facing - 2 details
3. Facing of top part of the skirt - 1 detail
4. Facing of middle part of the skirt - 1 detail
5. Facing of middle part of the skirt_2 - 1 detail

INSTRUCTIONS:

1. Apply fusing to buttonstands and facings of the skirt.
2. Sew darts on details of back part. Press darts to middle edge. Sew top and lower parts of back part. Press seam upwards and serge.
3. Cut 5 cm on left lower part of back part along vertical edge of the vent. Apply fusing to vent on both details of lower part of back part from wrong side. Mark middle seam line from right side seam (vent foldline). Press left part along vent fold line, press only seam allowance of right side of the vent (6 cm) on right part onto wrong side. Level details on middle seam and fix on top edge of the vent. Serge middle edge of back part separately on each detail. Serge seam allowances of the vent. Sew middle edge of back part from zipper marker up to vent corner. Slash corner of vent seam allowance on right part. Press seam allowance of middle seam apart, press seam allowances of the vent and fix them with machine stitch. Sew in zipper from top edge up to notches.
4. Sew relieve edges of top front part, press seam allowances towards center and serge.
5. Fold buttonstands with front part right sides together and overstretch edge of central front part. Slash seam allowances on rounded parts, turn buttonstands onto wrong side. Press upper edge of front part inset onto wrong side on 1 cm, then again on 2 cm and topstitch. Put buttonstands on inset right sides onto right side from marker up to lower edge and fix. Serge outer edge of buttonstands and topstitch it on front part into relieve edge.
6. Fold top part of the skirt with facing right sides together and overstretch lower edge. Slash seam allowances on rounded parts, turn the facing onto wrong side. Fold middle part of the skirt with facing of top part of the skirt right sides together and sew. Press the seam upwards and serge. Topstitch the facing on skirt into connecting seam of facings and middle part of the skirt.
7. Make and fasten according to markers plaits on middle part of the skirt_2 (depths are directed upwards). Fold middle part of the skirt_2 with facing right sides together and overstretch lower edge. Slash seam allowances on rounded parts, turn the facing onto wrong side. Fold lower part of the skirt with facing of middle part of the skirt_2 right sides together and sew. Press the seam upwards and serge. Topstitch the facing on skirt into connecting seam of facings and lower part of the skirt.
8. Fold middle part of the skirt with facing right sides together and overstretch lower edge. Slash seam allowances on rounded parts, turn the facing onto wrong side. Fold middle part of the skirt_2 with facing of middle part of the skirt right sides together and sew. Press the seam upwards and serge. Topstitch the facing on юбки into connecting seam of facings and middle part of the skirt_2.
9. Sew top part of front part with the skirt, press seam allowances upwards and serge.
10. Serge inner edge of the of back part neckline facing. Fold dress with facing right sides together, leveling neckline edges. Turn the facing leaving 5 mm to zipper edges and pin to top edge of the dress. Turn seam allowances along zipper on right side of the dress and pin to neckline edge on top facing. Overstretch neckline edge, starting and finishing the stitch exactly near marked line of shoulder seam. Slash seam allowances on rounded parts, turn details out and press. Tack facing to zipper tape.
11. Sew shoulder seams, inserting front part between back part and back part facing. Press seam allowances, serge. Turn the facing onto wrong side.
12. Sew pairwise sleeves of back part and of front part, press seam allowances apart. Fold sleeve right sides together and overstretch outer and short sides. Slash seam allowances in corners, turn onto right side. Fold sleeve with armholes and stitch. Press seam allowances and serge.
13. Sew side seams, press seam onto back part and serge.
14. Press seam allowance of hem of the dress onto wrong side on 1 cm, then again on 2 cm and topstitch.
15. Make plaits on details of the belt (depths are directed upwards). Fold belt with lining, inserting hooks into one of short sides and overstretch on contour, leaving a slit for turning out. Slash seam allowances in corners away, turn belt onto right side, sew the slit, press. Sew eyes on opposite side.

TECHNICAL DRAWING:

