

Sewing Pattern — One-piecer 4035

Recommendations on fabric: natural or mixed knitted fabric of medium stretchiness.

You will also need: zipper


If the pattern has double contour the seam allowances are included.

Seam allowances are NOT included by default and need to be added when laying out and cutting details if your pattern has single contour.

Seam allowance: all seams 0.7 cm, hem of the garment - 2 cm, back part and front part armholes edges – 1.5 cm, top edge of front part – 5 cm .

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

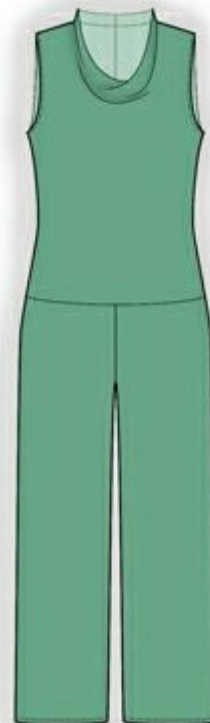

CUTTING:

Fabric:

1. Back half – 2 details
2. Front half – 2 details
3. Front part – 1 detail
4. Stand-up part of collar – 4 details

Advice:

Knitted fabric details are sewn together with special elastic or narrow zig-zag stitch. When serging cut seam allowances to 0.6 – 0.8 cm. Seam allowance on turnup is stitched with twin needles to save stretchiness. Details also can be sewn together via 3 or 4 – threaded serger.

INSTRUCTIONS:

1. Serge center edges on back halves. Sew center edge of back part from zipper notch downwards. Press seam allowances, pressing apart the slit for zipper.
2. Sew outer stand-up part of collar into the back part neckline, press seam allowances upwards. Sew zipper into center edge of back part.

3. Serge lower edge of inner stand-up parts. Put inner stand-up part of collar onto outer and overstretch upper edge, turn onto right side, press. Turn center edge of inner stand-up part inside and undersew to zipper tape. Topstitch serged edge of inner stand-up part into outer stand-up part connecting seam.
4. Sew center edge of front halves, press seam allowances. Stitch front part detail to front halves, press seam allowances upwards. Serge upper edge of front part.
5. Fold shoulder edges of front part and of back part right sides together, put seam allowance of top edge of front part around stand-up part of collar and sew. Press seam allowances. Turn seam allowance of front part onto wrong side.
6. Sew side seams, press seam allowances onto back part. Sew leg edges, press seam allowances onto back half.
7. Serge seam allowance of pants hem and back part / front part armholes, press it onto wrong side and topstitch.

TECHNICAL DRAWING:

