

Sewing Pattern — Skirt 5983

Recommendations on fabric: natural / mixed costume fabrics.

You will also need: lining; fusing; zipper; 3 buttons.


If the pattern has double contour the seam allowances are included.

Seam allowances are NOT included by default and need to be added when laying out and cutting details if your pattern has single contour.

Seam allowance: all seams - 1 cm, hem of the garment - 3 cm

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

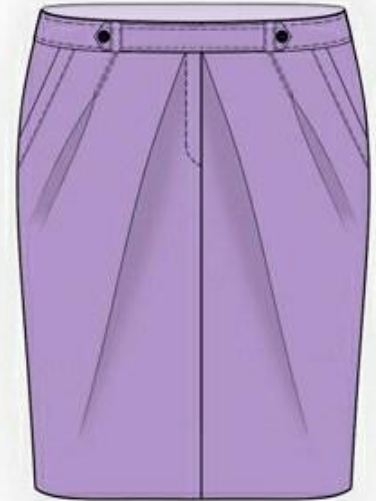

CUTTING:

Main fabric:

1. Right front panel – 1 detail
2. Left front panel – 1 detail
3. Back panel – 2 details
4. Back part facing – 2 details
5. Facing of left panel – 2 details
6. Facing of right panel – 2 details
7. Pocket decoration – 2 details
8. Fly-piece – 1 detail
9. Button catch – 1 detail
10. Side body – 2 details
11. Decoration of the belt – 2 details

Lining:

1. Big lining – 2 details
2. Small lining – 2 details

Fusing: Upper facings of front and back panels, button catch.

INSTRUCTIONS:

1. Apply fusing to facings of front and back panels, fly-piece, button catch and vent seam allowances.
2. Sew darts on details of back panel, press depths towards center. Make pleats on front panel and fix them along top edge. Sew the dart at 8 cm off the top edge. Spread the depth of darts on both sides, making counter pleats. Put decorative stitch at 0.2 cm off the darts connecting seam from two sides.

3. Put decoration of pocket onto right side of front panel right side upwards, put big pocket bag on the top and sew. Turn inside seam allowance of the decoration and topstitch. Turn pocket bag onto wrong side and press. Sew side body with small pocket bag. Serge and press onto lining. Sew small and big of pocket bags.
4. Stitch fly-piece to right panel. Sew center edge of front panels, starting the stitch near the edge of the fly-piece, serge edge and press onto left side. Press the fly-piece onto wrong side. Align zipper to center edge of left half and stitch. Stitch free tape of zipper to fly-piece of right half. Fold button catch in half lengthwise wrong sides together and sew longitudinal and short lower edges. Serge open edges of button catch. Stitch button catch to zipper connecting seam, to left half. Make barred end on closure end from right side of the skirt. Join lower ends of fly-piece and button catch from wrong side. Put decorative stitch along marked line on right panel.
5. Serge center edges of back panel separately on each detail, serging the vent at the same time. Sew center edge from top up to vent edge. Press seam allowances to left side edge. Press right side of the vent at 1 cm and topstitch. Fix vent seam allowances with machine stitch from right side.
6. Sew side seams. Press seam allowances onto back panel and serge.
7. Fold belt loop detail in half lengthwise and press. Turn edges inside and put 2 parallel stitches at 0.1 cm off the edge. Cut belt loops. Mark belt loops location and stitch to top edge of the skirt.
8. Sew side seams of the facings, press seam allowances apart. Serge lower edge of inner facing. Overstitch corners and upper edge of the facings. Stitch outer facing to skirt. Press seam allowance onto the facing. Put the stitch into facing connecting seam, fixing inner part at the same time. Put decorative stitch at 0.5 cm off top and lower edges of the facing. Turn belt loops away, turn seam allowance and topstitch.
9. Fold decoration details right sides together and overstitch, leaving a slit. Slash seam allowances away, turn and press, sew the slit. Put decorative stitch at 0.5 cm off the decoration edge. Make buttonholes on decoration of the belt.
10. Serge lower edge of the skirt, press onto wrong side and topstitch.
11. Make buttonhole on skirt and sew buttons.
12. Run decoration of the belt through belt loops and button up.

TECHNICAL DRAWING:

