

## Sleeveless Denim Dress - Sewing Pattern #2726

Recommendations on fabric: natural/mixed jeans fabrics.

You will also need: fusible interfacing; dress zipper.


Seam allowances: all seams 1 cm; seam allowance for hem of garment - 2 cm.

### Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

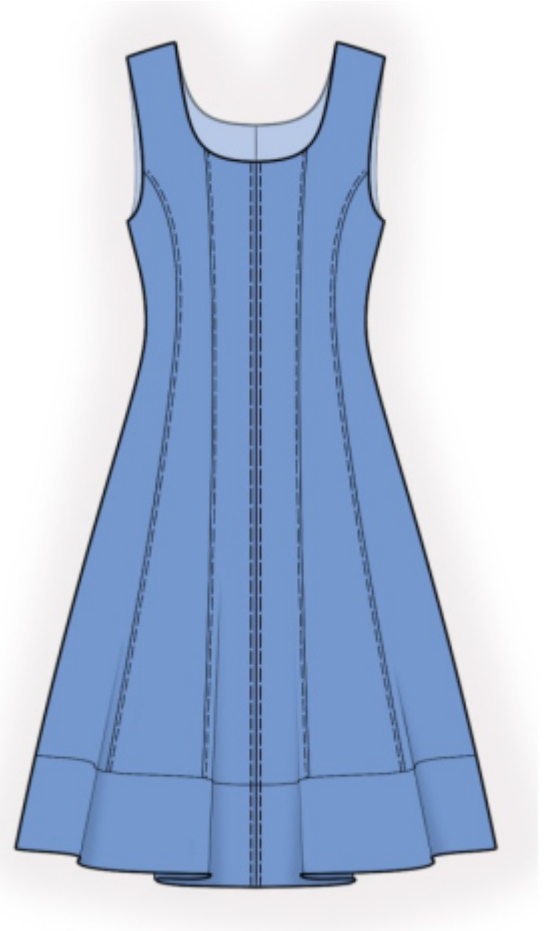

## CUTTING:

### Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Center back - cut 2
2. Center back - cut 2
3. Side back - cut 2
4. Center front - cut 2
5. Middle front - cut 2
6. Side front - cut 2
7. Lower back - cut 2

8. Lower front - cut 2
9. Back neck facing - cut 2
10. Front neck facing - cut 1

Fusible interfacing:

1. Back neck facing - cut 2
2. Front neck facing - cut 1

## **INSTRUCTIONS:**

1. Apply interfacing to facings.
2. Sew side backs to center back, press seam allowances towards center, serge. Sew a decorative stitch along the seam at 0.7 cm. Sew the lower part to the back, press the seam allowances towards bottom, serge. Sew a decorative stitch along the seam at 0.7 cm.
3. Serge center back edges separately on each piece. Sew center back seam from marking for zipper to lower edge, press the seam apart. Sew in zipper.
4. Sew side fronts to front, press seam allowances towards center, serge. Sew a decorative stitch along the seam at 0.7 cm. Sew the lower part to the front, press the seam allowances towards bottom, serge. Sew a decorative stitch along the seam at 0.7 cm.
5. Sew center seam on front, press the seam apart, serge. Sew a decorative stitch along the seam at 0.7 cm.
6. Sew side and shoulder seams, press towards the back and serge.
7. Sew the shoulder seams of the neckline facings, press the seam apart. Serge the outer edge. Pin facing to garment right sides together and sew the neckline. Clip into curves, turn the facings onto the wrong side and press. Slipstitch to shoulder seams and to zipper tape.
8. Cut or use ready-made bias tape, its width should equal 4 cm and length should equal the length of armhole + 4 cm. Fold bias tape in half lengthwise right side out and press. Pin the bias tape to the edge of the right armhole from the right side and sew, fold bias tape onto wrong side and topstitch onto main piece along the seam.
9. Serge bottom edge of dress, press onto wrong side and topstitch.

## **TECHNICAL DRAWING:**

