Sewing Pattern — Skirt With Lacing 5611

Recommendations on fabric: highly-stretchable stockinet.

You also need: 4 eyelets; tabs; decorative cord; elastic braid of 4-4.5 cm width.

If the pattern has double contour the seam allowances are included.
Seam allowances are NOT included by default and need to be added when laying out and cutting details if your pattern has single contour.

Seam allowance: 1 cm for all seams, 2 cm for hem.

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

CUTTING:

Fabric:

1. Center back skirt – 1 piece
2. Side back skirt – 2 pieces
3. Center front skirt – 1 piece
4. Side front skirt – 2 pieces
5. Waistband – 1 piece

INSTRUCTIONS:

1. Prepare the cord: cut a beam stripe of 2 cm width. Fold long edges under and press so that edges meet in the center. Fold the cord along the center and topstitch at 0.2 cm from the edge.
2. Prepare loops: cut a cord into 4-5 cm length segments.
3. Stitch loops to side front/back parts.
4. Stitch front/back relieves. Neaten allowances and press them towards front/back sides.
5. Neaten side seams and stitch them. Press side seams apart.
6. Press the waistband along the center. Lay the waistband flat and stitch as a ring leaving a hole for elastic braid. Neaten waistband's inner edge. Stitch waistband's outer edges to skirt upper edge according to marks. Fold inner edge into wrong side and topstitch along joining seam.
7. Neaten skirt hem, fold it under, press and topstitch.
8. Pull the cord into eyelets and set tabs. Pull elastic braid into waistline hole and stitch it as a ring.
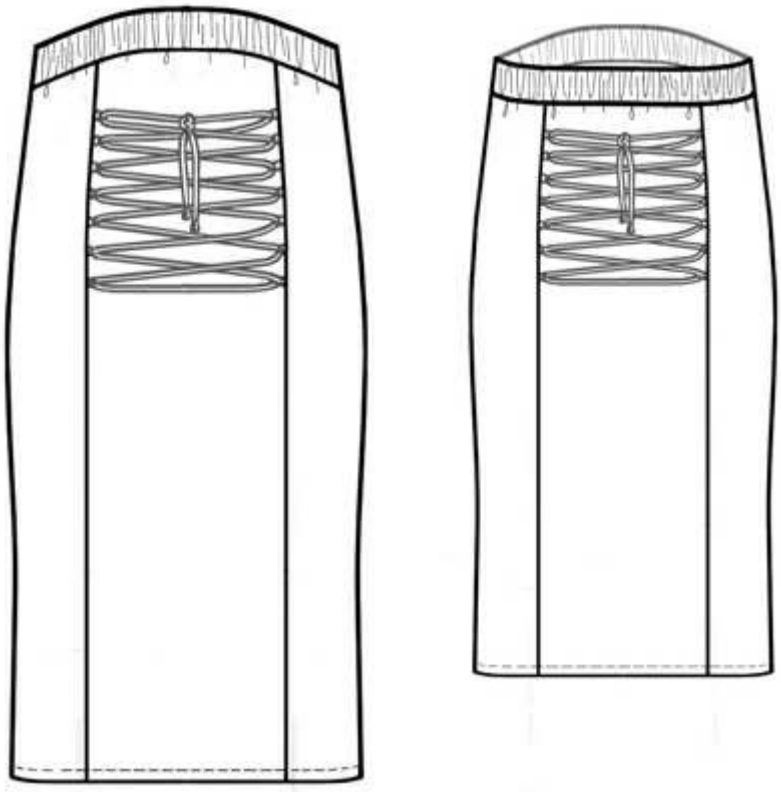
TECHNICAL DRAWING: