

Bonnet Hood - Sewing Pattern #2375

Recommendations on fabric: natural/mixed knit fabric of medium stretchiness in two colours.

You will also need: 2 grommets; decorative cord (approximate length is mentioned on the hood pattern block).

Seam allowances: all seams 1 cm.

Note on seam allowances:


- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

Note on working with stretchy fabric:

Knitted fabric pieces are sewn together with special elastic or narrow zig-zag stitch. Seam allowance on hems can be stitched with twin needles to save stretchiness. Pieces can also be sewn together with a serger. When serging, cut seam allowances to 0.6 – 0.8 cm.

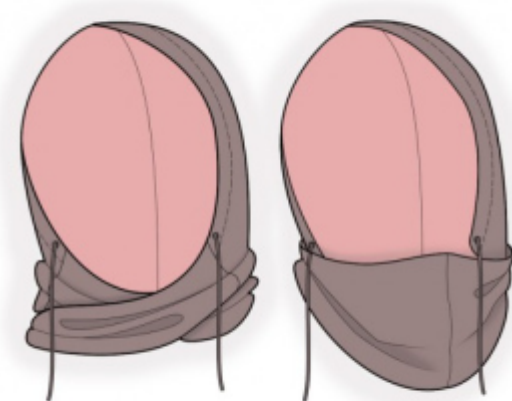

CUTTING:

Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Hood - cut 2
2. Scarf - cut 2

Main fabric 1:

1. Hood - cut 2
2. Scarf - cut 2

INSTRUCTIONS:

1. Pin hoods together pairwise right sides together and sew center edges of hood. Press the seam apart. Install grommets on the upper part of hood. Pin hoods together right sides together and sew the outer edge.
2. Pin scarves together pairwise right sides together and sew the short straight edge of scarf. Press the seam apart. Pin upper scarf to lower scarf right sides together and sew the longer edges. Turn the scarf right side out.
3. Sew the right lower edge of hood at the area from the outer edge and not reaching the center seam by 4 - 5 cm, inserting the right side of scarf. Twist the left side of scarf by 360 degrees. Sew the left lower edge of hood in the same way as the right side. Turn the hood right side out.
4. Sew the opening closed.
5. Sew a stitch along the outer edge of hood at 2 cm from the edge, making a casing. Thread cord into casing.

TECHNICAL DRAWING:

