

## Skirt With Shaped Princess Seams - Sewing Pattern #4844

Recommendations on fabric: natural/mixed fabrics of dense texture.

You will also need: fusible interfacing; 1 dress zipper.


Seam allowances: all seams 1 cm. Seam allowance for hem of garment - 4 cm.

### Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### Note on length of fabric:

*Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.*

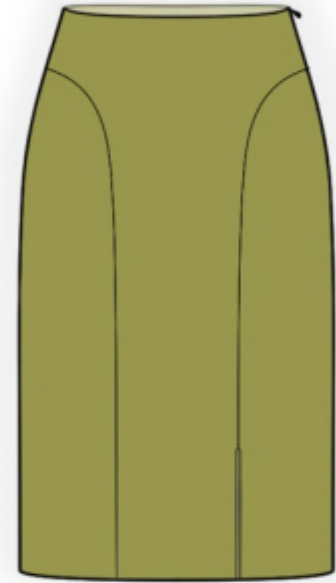

## CUTTING:

### Note on cutting:

*On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.*

*When sewing the garment, pay attention to notches, they must match up.*

Main fabric:

1. Center back skirt - cut 1 on fold
2. Side back skirt - cut 2
3. Side front skirt - cut 2
4. Center front skirt - cut 1 on fold
5. Back facing - cut 1
6. Front facing - cut 1

Fusible interfacing:

1. Back yoke - cut 1
2. Front yoke - cut 1

## **INSTRUCTIONS:**

1. Apply fusible interfacing to yokes.
2. Sew center back skirt to side back skirt, press towards center and serge.
3. Serge left princess edges of front skirt. Sew left princess seam from top to notch for slit (sew left side to center front). Seam Allowances шва press apart, pressing the slit at the same time. Sew a decorative stitch at 0.2 cm from the edge of the slit. Sew right skirt to front skirt, press towards center and serge.
4. Serge left side edges separately. Sew left side seam from notch for zipper to bottom. Seam Allowances шва press apart. Sew in zipper. Sew right side edge, press towards the back and serge.
5. Sew right side edge on facings, press the seam apart. Serge lower edge. Pin facing to skirt right sides together and sew upper edge. Topstitch seam allowances onto facing at 0.2 cm from the seam. Turn facing under, press. Fold inside side edges facings and sew to zipper tape.
6. Serge lower edge of skirt, press onto wrong side and finish with hidden stitches.

## **TECHNICAL DRAWING:**

