

## Skirt With Wrap - Sewing Pattern #4863

Recommendations on fabric: thin natural/mixed suiting fabrics.

You will also need: fusible interfacing; 1 button.


Seam allowances: all seams 1 cm. Seam allowance along slanted edge of front skirt - 6 cm; seam allowance along hem of front skirt and back skirt - 3 cm.

### Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### Note on length of fabric:

*Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.*

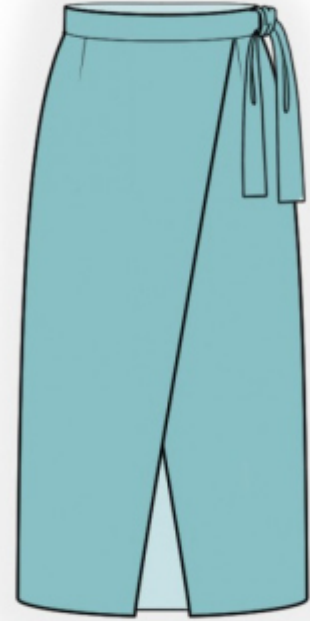

## CUTTING:

### Note on cutting:

*On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.*

*When sewing the garment, pay attention to notches, they must match up.*

Main fabric:

1. Back - cut 1 on fold
2. Front skirt - cut 2
3. Back belt - cut 1
4. Left front belt - cut 1
5. Right front belt - cut 1
6. Fly belt - cut 1

Fusible interfacing:

1. Back belt - cut 1
2. Left front belt - cut 1
3. Right front belt - cut 1
4. Fly belt - cut 1

## **INSTRUCTIONS:**

1. Apply fusible interfacing to belt.
2. Sew darts on back skirts and right skirts, press the inner part towards center.
3. Serge slanted edge of front skirt, press onto wrong side and topstitch.
4. Sew side seams, press seam allowances towards back and serge.
5. Sew back belt to left front belt and to right front belt, press the seam apart. Fold belt in half lengthwise, right sides together and sew short sides and the tie. Start stitching exactly at the marked line of seam between belt and skirt. Clip into seam allowances near the notch, belt turn right side out and press. Sew outer edge of belt to upper edge, turn inner edge under and topstitch into seam of.
6. Fold fly belt in half lengthwise, right sides together and sew longer and one shorter edge. Trim away corners, turn belt right side out, straighten, press. Serge shorter edge. Topstitch fly belt onto seam between back belt and left front belt.
7. Serge lower edge of skirt, press onto wrong side and topstitch.
8. Make a button hole on left front belt. Sew on hidden button.

## **TECHNICAL DRAWING:**

