

## Dress With Lace Yoke - Sewing Pattern #4479

Recommendations on fabric: natural/mixed fabric suitable for dresses; lace fabric.

You will also need: dress zipper.


Seam allowances: all seams 1 cm; seam allowance for hem of dress - 2 cm, seam allowance for hem of sleeve - 1.2 cm.

### Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

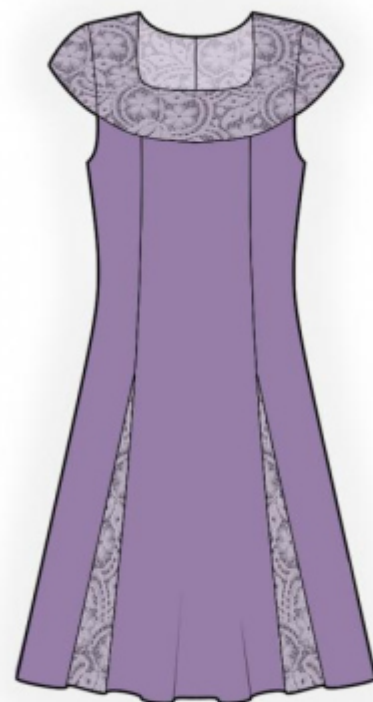

## CUTTING:

### Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Lace fabric:

1. Back yoke - cut 4
2. Front yoke - cut 2
3. Sleeve - cut 2
4. Lower gore - cut 2

Main fabric:

1. Center back — cut 2

2. Side back - cut 2
3. Side front — cut 2
4. Center front — cut 1

## INSTRUCTIONS:

1. Sew side backs to center back, press towards center and serge. Sew back yokes to back, press seam allowances towards yoke and serge. Serge center back edges separately. Sew center back seam from notch for zipper to bottom, press seam apart, pressing the slit at the same time. Sew in zipper.
2. Sew lower gores to central front, press seam, serge. Sew side fronts to front, press towards center and serge. Sew front yoke to front, press seam allowances towards yoke and serge.
3. Sew shoulder and side seams, press seams towards back and serge.
4. Sew shoulder seams on inner yokes, press seams towards back and serge. Serge lower edge.
5. Pin inner yoke together with outer yoke and sew the neckline. Clip seam allowances, fold inner yoke onto wrong side, straighten, press. Slip stitch center seams of inner yoke to zipper tape. Stitch-in-ditch inner yoke into seam of outer yoke and treat as one piece in the future.
6. Serge lower edge of sleeve. Fold seam allowance inside and topstitch. Sew sleeves into armholes, serge. Cut (or take ready) bias tape, its width should equal 4 cm and length should equal the length of lower armhole + 6 cm. Fold bias tape in half lengthwise right side out and press. Pin bias tape onto armhole edge from the right side, and sew. Fold bias tape onto wrong side, clip into seam allowances and topstitch onto main piece along the seam. Press seam.
7. Serge lower edge of dress. Turn seam allowances inside and topstitch.

## TECHNICAL DRAWING:

